

# LADDER SELECTION & SAFETY TIPS



## DUTY RATINGS

| LABEL  | USE                                | APPLICATION              |
|--|------------------------------------|--------------------------|
| HOUSEHOLD<br><b>TYPE III</b><br>200 lbs.                 | <b>HOUSEHOLD LIGHT DUTY</b>        | Homeowner Light Duty     |
| COMMERCIAL<br><b>TYPE II</b><br>225 lbs.                 | <b>COMMERCIAL MEDIUM DUTY</b>      | Handyman Light Mechanics |
| INDUSTRIAL<br><b>TYPE I</b><br>250 lbs.                  | <b>INDUSTRIAL HEAVY DUTY</b>       | Construction Maintenance |
| HEAVY DUTY INDUSTRIAL<br><b>TYPE IA</b><br>300 lbs.      | <b>EXTRA HEAVY DUTY INDUSTRIAL</b> | Electrical Construction  |
| SPECIAL DUTY PROFESSIONAL<br><b>TYPE IAA</b><br>375 lbs. | <b>SPECIAL DUTY PROFESSIONAL</b>   | Utility Telco CATV       |

LYNN LADDER & SCAFFOLDING CO., INC.  
is a member of the following organizations:



It is our policy to educate the users of our climbing products as to the safe and proper selection, care, use and erection. Throughout this catalog you will find safety notes and guidelines to follow. These safety notes are not meant to be a substitute for learning what ANSI and OSHA laws and codes say about our products. They are only intended to be used as a guide to help you select the right product for the job.

Lynn Ladder and Scaffolding offers a "**COMPETENT PERSON TRAINING**" program for safe and efficient scaffold erection and dismantling procedures. Call for brochure. To get more information about the safe use of all climbing products, please contact our Lynn office.

[www.lynnladder.com](http://www.lynnladder.com)

## CONSIDER THE APPLICATION

### HOUSEHOLD

Economical, lightweight and dependable.

### COMMERCIAL

For the handyman, painter, mechanic and for general purpose.

### INDUSTRIAL

For heavy-duty use. Stable, built to take it. For construction, maintenance or industrial work.

### EXTRA HEAVY-DUTY INDUSTRIAL

Our heavy grade. For rugged industrial, construction, rental or maintenance use.

### SPECIAL DUTY/PROFESSIONAL

Our heaviest grade. Designed for your heavier, more demanding workloads.


## SELECT THE RIGHT MATERIAL

**FIBERGLASS** is a non-conductive, strong and colorful, and has become a leading choice for the serious do-it-yourselfer, commercial or industrial user.

**ALUMINUM** is lightweight and strong, but it conducts electricity and should never be used near energized electric wires.

**WOOD** is solid, stable and non-conductive when clean and dry.

Remember, never use a defective or broken ladder! Call for repair service information.



**Read all product labels for information on duty ratings and proper use instructions.**

## TRANSPORTING OUR PRODUCTS

*When transporting any ladder or scaffolding on any vehicle, proper care should be taken to secure the equipment. Lynn Ladder offers a complete line of Vanguard Ladder and Material Racks to fit all style vans and pickup trucks.*

## PRODUCT STANDARDS

| STANDARDS   | APPLICABLE PRODUCT & CODES   |
|---|--|
| <p>MANUFACTURER CERTIFIES COMPLIANCE TO<br/><b>ANSI</b> STANDARDS</p> <p><b>American National Standards Institute</b></p> | <p><b>Product Lines Meet or Exceed ....ANSI Code</b></p> <p>Wood Ladders..... A14.1<br/>                     Aluminum Ladders..... A14.2<br/>                     Fixed Ladders..... A14.3<br/>                     Rolling Steel Ladders..... A14.7<br/>                     Attic Stairways..... A14.9<br/>                     Aluminum Stages..... A10.8<br/>                     Scaffolding..... A10.8</p> |
| <p>CERTIFIED TO MEET<br/><b>OSHA</b> REQUIREMENTS</p> <p><b>Occupational Safety And Health Act</b></p>                    | <p>All Type III, II, I, IA and IAA Fiberglass, Aluminum and Wood Ladders, Ladder Jacks and Extension Planks meet or exceed code. OSHA CODE applies to Ladders used in the workplace. Lynn Ladder &amp; Scaffolding recommends Type I Ladders or Heavier Duty Rated Ladders for these applications.</p>   |



# FIBERGLASS LADDERS

## FL300 SERIES "FIBERLITE" FIBERGLASS STEPLADDER



| MODEL   | SIZE       | OPEN HEIGHT | STANDING HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|---------|------------|-------------|-----------------|------------|------------|---------|
| FL302   | 2 ft.      | 23"         | 11"             | 18"        | 17"        | 8 lbs.  |
| FL303   | 3 ft.      | 34"         | 11"             | 19"        | 25"        | 13 lbs. |
| FL304   | 4 ft.      | 45"         | 24"             | 20"        | 32"        | 17 lbs. |
| FL305   | 5 ft.      | 56"         | 34"             | 21"        | 37"        | 21 lbs. |
| FL306   | 6 ft.      | 68"         | 45"             | 23"        | 43"        | 24 lbs. |
| FL308   | 8 ft.      | 90"         | 67"             | 26"        | 55"        | 32 lbs. |
| FL310   | 10 ft.     | 113"        | 90"             | 29"        | 62"        | 40 lbs. |
| FL312   | 12 ft.     | 135"        | 112"            | 32"        | 79"        | 57 lbs. |
| FL99163 | Pail Shelf |             |                 |            |            |         |



### FL300 SERIES FEATURES:

- Non-Conductive Fiberglass Rails
- High-Impact, Molded, Black Plastic Top Cap with Deep Tool Tray and Tool Holes
- Double-Riveted, Ribbed, 3" Wide Steps
- Heavy-Duty, Rubber-Padded Safety Shoes

## FL300P SERIES FIBERGLASS PLATFORM LADDER

| MODEL  | SIZE | PLATFORM HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|--------|------|-----------------|------------|------------|---------|
| FL304P | 4'   | 23"             | 21"        | 28"        | 15 lbs. |
| FL305P | 5'   | 34"             | 23"        | 36"        | 21 lbs. |
| FL306P | 6'   | 45"             | 25"        | 42"        | 25 lbs. |
| FL307P | 7'   | 55"             | 26"        | 48"        | 30 lbs. |
| FL308P | 8'   | 67"             | 27"        | 55"        | 33 lbs. |
| FL310P | 10'  | 91"             | 30"        | 67"        | 41 lbs. |
| FL312P | 12'  | 112"            | 33"        | 79"        | 56 lbs. |

### FL300P SERIES FEATURES:

- Non-conductive fiberglass rails
- Large, serrated slip-resistant platform measures 14¼" x 18¼"
- Each step secured by six rivets for extra strength
- Each step & rear horizontal is fully braced to side rails for extra rigidity
- Aluminum top cross brace serves as a safety rail when standing on platform
- Heavy-duty, rubber-padded safety shoes



## FL300T SERIES "TWIN-STEP" FIBERGLASS STEPLADDER

| MODEL  | SIZE | OPEN HEIGHT | STANDING HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT   |
|--------|------|-------------|-----------------|------------|------------|----------|
| FL303T | 3'   | 34"         | 11"             | 19"        | 33"        | 18 lbs.  |
| FL304T | 4'   | 45"         | 23"             | 20"        | 41"        | 21 lbs.  |
| FL305T | 5'   | 57"         | 34"             | 22"        | 49"        | 25 lbs.  |
| FL306T | 6'   | 67"         | 45"             | 23"        | 57"        | 30 lbs.  |
| FL308T | 8'   | 90"         | 67"             | 26"        | 73"        | 41 lbs.  |
| FL310T | 10'  | 112"        | 89"             | 29"        | 89"        | 52 lbs.  |
| FL312T | 12'  | 135"        | 112"            | 32"        | 106"       | 72 lbs.  |
| FL314T | 14'  | 160"        | 138"            | 36"        | 122"       | 94 lbs.  |
| FL316T | 16'  | 184"        | 162"            | 39"        | 141"       | 112 lbs. |

### FL300T SERIES FEATURES:

- Non-Conductive Fiberglass Rails
- Heavy-Duty, Extruded Aluminum Top
- Heavy-Duty, Rubber-Padded Safety Shoes



## FX200 SERIES "FIBERMASTER" FIBERGLASS STEPLADDER

### FX200 SERIES FEATURES:

- Non-Conductive Fiberglass Rails
- High-Impact, Molded Plastic Top Cap With Deep Tool Tray and Tool Holes
- Ribbed, 3" Wide Steps
- Heavy-Duty, Rubber-Padded Safety Shoes



| MODEL | SIZE | OPEN HEIGHT | STANDING HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|-------|------|-------------|-----------------|------------|------------|---------|
| FX204 | 4'   | 46"         | 23"             | 20"        | 30"        | 15 lbs. |
| FX205 | 5'   | 57"         | 34"             | 21"        | 34"        | 18 lbs. |
| FX206 | 6'   | 68"         | 45"             | 23"        | 43"        | 20 lbs. |
| FX208 | 7'   | 90"         | 67"             | 26"        | 55"        | 26 lbs. |



# FIBERGLASS LADDERS



## FT300 SERIES "TRIUMPH" FIBERGLASS STEPLADDER

| MODEL   | OPEN HEIGHT | STANDING HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|---------|-------------|-----------------|------------|------------|---------|
| FT303   | 34"         | 11"             | 19"        | 22"        | 17 lbs. |
| FT304   | 45"         | 23"             | 20"        | 32"        | 19 lbs. |
| FT305   | 56"         | 34"             | 21"        | 37"        | 23 lbs. |
| FT306   | 68"         | 45"             | 23"        | 43"        | 28 lbs. |
| FT308   | 90"         | 67"             | 26"        | 55"        | 38 lbs. |
| FT310   | 113"        | 90"             | 29"        | 62"        | 47 lbs. |
| FT312   | 135"        | 112"            | 32"        | 79"        | 64 lbs. |
| FL99163 | PAIL SHELF  |                 |            |            |         |

### FT300 SERIES FEATURES:

- Non-Conductive Fiberglass Rails
- Front Rails: 3/4"
- Back Rails: 1/8"
- Rigid Plastic Top
- Heavy-Duty, Rubber-Padded Safety Shoes



18" WIDTH

## FGE SERIES "GENERAL" FIBERGLASS EXTENSION LADDER

### FGE SERIES FEATURES:

- Most Popular for Contractors & Industrial Use
- 1 5/8" Corrugated "D" Style Rungs
- Extruded Aluminum Double Rung Locks
- Combination Shoes With Spur Points
- Non-Conductive Fiberglass Rails
- Mar-Resistant End Caps & Rail Enclosures
- Outside Guide Irons



| MODEL   | SIZE | MAX OPEN HEIGHT | OUTSIDE WIDTH | INSIDE WIDTH | OUTSIDE WIDTH | INSIDE WIDTH | WEIGHT  |
|---------|------|-----------------|---------------|--------------|---------------|--------------|---------|
| FGE16-2 | 16'  | 13"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 34 lbs. |
| FGE20-2 | 20'  | 17"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 43 lbs. |
| FGE24-2 | 24'  | 21"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 51 lbs. |
| FGE28-2 | 28'  | 25"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 58 lbs. |
| FGE32-2 | 32'  | 28"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 65 lbs. |

|        |     |     |           |          |           |          |         |
|--------|-----|-----|-----------|----------|-----------|----------|---------|
| FE3236 | 36' | 32' | 17 11/16" | 15 5/16" | 16 11/16" | 14 5/16" | 79 lbs. |
| FE3240 | 40' | 35' | 17 11/16" | 15 5/16" | 16 11/16" | 14 5/16" | 93 lbs. |

## FT300T SERIES "TWIN-STEP" FIBERGLASS STEPLADDER

### FT300T SERIES FEATURES:

- Non-Conductive Fiberglass Rails
- Front Rails: 3/4"
- Back Rails: 3/4"
- Heavy-Duty, Rubber-Padded Safety Shoes



| MODEL  | SIZE | OPEN HEIGHT | STANDING HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|--------|------|-------------|-----------------|------------|------------|---------|
| FT303T | 3'   | 34"         | 11"             | 19"        | 33"        | 22 lbs. |
| FT304T | 4'   | 45"         | 23"             | 20"        | 41"        | 25 lbs. |
| FT305T | 5'   | 57"         | 34"             | 22"        | 49"        | 30 lbs. |
| FT306T | 6'   | 67"         | 45"             | 23"        | 57"        | 36 lbs. |
| FT308T | 8'   | 90"         | 67"             | 26"        | 73"        | 49 lbs. |
| FT310T | 10'  | 112"        | 89"             | 29"        | 89"        | 62 lbs. |
| FT312T | 12'  | 135"        | 112"            | 32"        | 106"       | 82 lbs. |



16" WIDTH

## FXE SERIES "FIBERMASTER" FIBERGLASS EXTENSION LADDERS

### FXE SERIES FEATURES:

- For Industrial Use
- 1 5/8" Corrugated "D" Style Rungs
- Extruded Aluminum Double Rung Locks
- Combination Shoes with Spur Points
- Non-Conductive Fiberglass Rails
- Mar-resistant End Caps & Rail Enclosures
- High Impact Plastic Guides for Smooth Operation



| MODEL   | SIZE | MAX OPEN HEIGHT | OUTSIDE WIDTH | INSIDE WIDTH | OUTSIDE WIDTH | INSIDE WIDTH | WEIGHT  |
|---------|------|-----------------|---------------|--------------|---------------|--------------|---------|
| FXE16-2 | 16'  | 13"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 32 lbs. |
| FXE20-2 | 20'  | 17"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 38 lbs. |
| FXE24-2 | 24'  | 21"             | 17 1/8"       | 14 3/4"      | 16 1/8"       | 13 3/4"      | 45 lbs. |

## D5800 SERIES FIBERGLASS EXTENSION LADDER

**\*DISCONTINUED ITEM\***

- Large Heavy Duty Pivot Feet with Slip Resistant Rubber Pads and Ice Pick

| D5800 EXTENSION |        |         |
|-----------------|--------|---------|
| MODEL           | SIZE   | WEIGHT  |
| D5816-2         | 16 ft. | 28 lbs. |
| D5820-2         | 20 ft. | 32 lbs. |
| D5824-2         | 24 ft. | 38 lbs. |
| D5828-2         | 28 ft. | 42 lbs. |

D5800 SERIES




# FIBERGLASS LADDERS




UFG-1 SERIES (Round Rung)  
DUFG-1 SERIES (Flat Rung)  
18 1/8" WIDTH

UFG-2 SERIES (Round Rung)  
DUFG-2 SERIES (Flat Rung)  
18 1/8" WIDTH



Cable Hook & V-Rung  
Assembly  
Model LCH-VR

CABLE HOOK & V RUNG ASSEMBLY CAN BE ADDED TO ANY UFG-2 & DUGF-2 EXTENSION LADDERS BY ADDING XA TO MODEL NUMBER WEIGHT 3 LBS.



V-BAR ONLY

Lynn Ladder & Scaffolding carries a variety of Ladder Parts and Accessories. Please call your local Lynn Ladder branch for more information.

## ROUND RUNG EXTENSIONS

| MODEL   | SIZE   | WORK LENGTH | WEIGHT  |
|---------|--------|-------------|---------|
| UFG16-2 | 16 ft. | 13 ft.      | 39 lbs. |
| UFG20-2 | 20 ft. | 17 ft.      | 46 lbs. |
| UFG24-2 | 24 ft. | 21 ft.      | 55 lbs. |
| UFG28-2 | 28 ft. | 25 ft.      | 62 lbs. |
| UFG32-2 | 32 ft. | 28 ft.      | 70 lbs. |

## ROUND RUNG SINGLES

| MODEL   | SIZE   | WEIGHT  |
|---------|--------|---------|
| UFG08-1 | 8 ft.  | 18 lbs. |
| UFG10-1 | 10 ft. | 21 lbs. |
| UFG12-1 | 12 ft. | 24 lbs. |
| UFG14-1 | 14 ft. | 28 lbs. |
| UFG16-1 | 16 ft. | 31 lbs. |

## FLAT RUNG EXTENSIONS

| MODEL    | SIZE   | WORK LENGTH | WEIGHT  |
|----------|--------|-------------|---------|
| DUFG16-2 | 16 ft. | 13 ft.      | 39 lbs. |
| DUFG20-2 | 20 ft. | 17 ft.      | 46 lbs. |
| DUFG24-2 | 24 ft. | 21 ft.      | 55 lbs. |
| DUFG28-2 | 28 ft. | 25 ft.      | 62 lbs. |
| DUFG32-2 | 32 ft. | 28 ft.      | 70 lbs. |

## FLAT RUNG SINGLES

| MODEL    | SIZE   | WEIGHT  |
|----------|--------|---------|
| DUFG08-1 | 8 ft.  | 20 lbs. |
| DUFG10-1 | 10 ft. | 25 lbs. |
| DUFG12-1 | 12 ft. | 28 lbs. |
| DUFG14-1 | 14 ft. | 32 lbs. |
| DUFG16-1 | 16 ft. | 38 lbs. |

## MANHOLE UTILITY SINGLES

| MODEL    | SIZE   | WEIGHT  |
|----------|--------|---------|
| MUFG08-1 | 8 ft.  | 21 lbs. |
| MUFG10-1 | 10 ft. | 25 lbs. |
| MUFG12-1 | 12 ft. | 27 lbs. |
| MUFG14-1 | 14 ft. | 32 lbs. |
| MUFG16-1 | 16 ft. | 36 lbs. |

## FIBERGLASS SHELF LADDERS

| MODEL  | SIZE   | WEIGHT  |
|--------|--------|---------|
| FLS306 | 6 ft.  | 14 lbs. |
| FLS308 | 8 ft.  | 21 lbs. |
| FLS310 | 10 ft. | 26 lbs. |
| FLS312 | 12 ft. | 31 lbs. |
| FLS314 | 14 ft. | 35 lbs. |
| FLS316 | 16 ft. | 40 lbs. |

## UFG & DUGF SERIES "UTILITY" FIBERGLASS EXTENSION LADDERS

### UFG & DUGF EXTENSIONS & SINGLES SERIES FEATURES:

- 1 1/4" Round Rungs or 1 5/8" Flat Rungs Connected to Aluminum Plates for Ease of Replacement
- Non-Conductive Fiberglass Rails
- Heavy-Duty Shoes with Rubber Pads & Spur Points
- Mar-Resistant End Caps & Rail Enclosures
- Heavy-Duty Cast Aluminum Double Rung Locks
- Nylon Coated Outside Guide Irons



## MUFG SERIES FIBERGLASS MANHOLE UTILITY LADDER

### MUFG SERIES FEATURES:

- Heavy-Duty Rail Wear Sleeves
- 1 1/4" Flat Rungs Connected to Aluminum Plates for Ease of Replacement
- Non-Conductive Fiberglass Rails
- Vinyl Coated Loop End Caps
- Extra Large Feet with Ribbed Rubber Pads



MUFG SERIES  
12" WIDTH



16" WIDTH  
FLS SERIES

### SHELF LADDER FEATURES:

- Non-Conductive Fiberglass
- Slip Resistant Feet
- 3" Double Riveted Steps
- Heavy-Duty Corrugated Rubber Bumper



FLS Bumper  
Style





# ALUMINUM LADDERS



## AS300 SERIES ALUMINUM STEPLADDER

### AS300 SERIES FEATURES:

- Ideal for Industrial Use
- High Impact Molded Blue Plastic Top
- Auto-Lock Pail Shelf
- 3" Double Riveted Ribbed Steps



AS300 SERIES

| MODEL | SIZE   | WIDTH (A) | SPREAD (B) | WT.     |
|-------|--------|-----------|------------|---------|
| AS303 | 3 ft.  | 17"       | 24"        | 8 lbs.  |
| AS304 | 4 ft.  | 18"       | 29"        | 12 lbs. |
| AS305 | 5 ft.  | 20"       | 35"        | 15 lbs. |
| AS306 | 6 ft.  | 21"       | 41"        | 17 lbs. |
| AS308 | 8 ft.  | 24"       | 54"        | 23 lbs. |
| AS310 | 10 ft. | 26"       | 66"        | 28 lbs. |
| AS312 | 12 ft. | 32"       | 78"        | 40 lbs. |

## D548-2 SERIES FLAT RUNG ALUMINUM EXTENSION LADDER

| MODEL  | SIZE | WORK LENGTH | WEIGHT     |
|--------|------|-------------|------------|
| D548-2 | 48'  | 43"         | 142.5 lbs. |



D548-2 SERIES

## D800-2 SERIES ALUMINUM EXTENSION

### D800-2 SERIES FEATURES:

- Designed for Roofers and heavy construction
- Corrugated "D" Rungs
- 3" Heavy Duty Stacked I-Beams
- Shoes with Spur Points on Base, Rubber shoes on Fly



D800-2 SERIES  
18" WIDTH

| MODEL    | SIZE   | MAX OPEN HEIGHT | WEIGHT  |
|----------|--------|-----------------|---------|
| D80016-2 | 16 ft. | 13 ft.          | 31 lbs. |
| D80020-2 | 20 ft. | 17 ft.          | 37 lbs. |
| D80024-2 | 24 ft. | 21 ft.          | 45 lbs. |
| D80028-2 | 28 ft. | 25 ft.          | 56 lbs. |
| D80032-2 | 32 ft. | 29 ft.          | 65 lbs. |
| D80036-2 | 36 ft. | 32 ft.          | 79 lbs. |
| D80040-2 | 40 ft. | 35 ft.          | 89 lbs. |

23 1/2" WIDTH



D3200 SERIES

## 560-3 SERIES ROUND RUNG ALUMINUM EXTENSION LADDER

| MODEL | SIZE | WORK LENGTH | WEIGHT   |
|-------|------|-------------|----------|
| 560-3 | 60'  | 47"         | 179 lbs. |



560-3 SERIES  
20 1/8" WIDTH

## D3200 SERIES ALUMINUM EXTENSION

| MODEL   | SIZE   | MAX OPEN HEIGHT | WEIGHT  |
|---------|--------|-----------------|---------|
| D3216-2 | 16 ft. | 13 ft.          | 31 lbs. |
| D3220-2 | 20 ft. | 17 ft.          | 37 lbs. |
| D3224-2 | 24 ft. | 21 ft.          | 45 lbs. |
| D3228-2 | 28 ft. | 25 ft.          | 56 lbs. |
| D3232-2 | 32 ft. | 29 ft.          | 65 lbs. |
| D3236-2 | 36 ft. | 32 ft.          | 79 lbs. |
| D3240-2 | 40 ft. | 35 ft.          | 89 lbs. |



- Heavy duty "Beam Construction, 3 1/16 x 1/14" rails provide stability, torque resistance and high strength to weight ratio
- Heavy duty serrated "D" rungs prevent slipping for safe climbing
- High impact non-marring end caps
- Premium heavy duty rung locks
- Heavy duty ribbed swivel feet with ice picks



## D800-1 SERIES SINGLES

| MODEL    | SIZE   | OVERALL WIDTH | WEIGHT  |
|----------|--------|---------------|---------|
| D80008-1 | 8 ft.  | 18"           | 14 lbs. |
| D80010-1 | 10 ft. | 18"           | 17 lbs. |
| D80012-1 | 12 ft. | 18"           | 21 lbs. |
| D80014-1 | 14 ft. | 18"           | 26 lbs. |
| D80016-1 | 16 ft. | 18"           | 31 lbs. |
| D80018-1 | 18 ft. | 18"           | 38 lbs. |
| D80020-1 | 20 ft. | 18"           | 43 lbs. |



# ALUMINUM SPECIALTY LADDERS

## HEAVY DUTY ALUMINUM SAWHORSE

| MODEL | SIZE | OPEN HEIGHT | BASE WIDTH | BASE DEPTH | WEIGHT  |
|-------|------|-------------|------------|------------|---------|
| 3702  | 2'   | 23"         | 32"        | 25"        | 10 lbs. |
| 3703  | 3'   | 35"         | 34"        | 32"        | 14 lbs. |
| 3704  | 4'   | 47"         | 35"        | 39"        | 19 lbs. |



## ALUMINUM MANHOLE SINGLE

- Special Purpose Ladder
- Box Girder Side Rail Construction
- Slip Resistant Shoes



| MODEL | SIZE   | WEIGHT  |
|-------|--------|---------|
| AMS08 | 8 ft.  | 12 lbs. |
| AMS10 | 10 ft. | 15 lbs. |
| AMS12 | 12 ft. | 18 lbs. |
| AMS14 | 14 ft. | 21 lbs. |
| AMS16 | 16 ft. | 24 lbs. |



**AMS SERIES**  
12" WIDTH

## ALUMINUM CLOSED TOP FRUIT SINGLE

| MODEL  | SIZE   | WEIGHT  | BASE WIDTH |
|--------|--------|---------|------------|
| ACTF11 | 11 ft. | 18 lbs. | 15 1/4"    |
| ACTF13 | 13 ft. | 20 lbs. | 20 3/4"    |
| ACTF15 | 15 ft. | 23 lbs. | 20 3/4"    |
| ACTF17 | 17 ft. | 27 lbs. | 25"        |
| ACTF19 | 19 ft. | 30 lbs. | 27"        |



**ACTF SERIES**


## ALUMINUM SECTIONAL WINDOW CLEANING LADDERS

Box rail construction and solid cast fittings provide unusual rigidity and stability when these sections are assembled. Maximum assembled length of sections must not exceed 26 feet.

| MODEL | DESCRIPTION      | WEIGHT  |
|-------|------------------|---------|
| AWB6  | 6-ft. Base       | 9 lbs.  |
| AWM6  | 6-ft. Middle     | 9 lbs.  |
| AWT6  | 6-ft. Top        | 9 lbs.  |
| AWT8  | 8-ft. Top        | 13 lbs. |
| AWTLP | Lock Pins (pair) | 2 oz.   |



**SPECIAL DUTY**

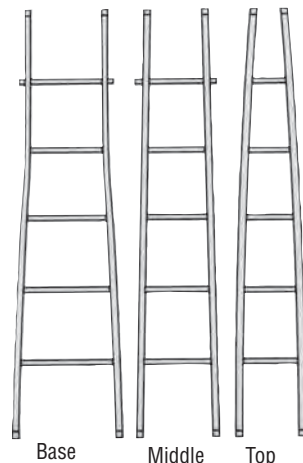

**AW SERIES**

\* CALL LYNN LADDER FOR AVAILABILITY OF THIS ITEM

## ALUMINUM ORCHARD STEPLADDERS

- Special Purpose Ladder
- Use For Fruit Picking and Tree Pruning Only
- Box Girder Side Rail Construction
- Slip Resistant Shoes

| MODEL  | SIZE   | WEIGHT  |
|--------|--------|---------|
| AORS05 | 5 ft.  | 20 lbs. |
| AORS06 | 6 ft.  | 24 lbs. |
| AORS08 | 8 ft.  | 30 lbs. |
| AORS10 | 10 ft. | 38 lbs. |
| AORS12 | 12 ft. | 45 lbs. |



**AORS SERIES**

# WOOD LADDERS



## MECHANIC STEPLADDER – Pine

| MODEL | SIZE       | WIDTH (A) | SPREAD (B) | WT.     |
|-------|------------|-----------|------------|---------|
| MES03 | 3 ft.      | 17½"      | 25¾"       | 18 lbs. |
| MES04 | 4 ft.      | 18¾"      | 31½"       | 22 lbs. |
| MES05 | 5 ft.      | 19¾"      | 40"        | 26 lbs. |
| MES06 | 6 ft.      | 21"       | 46½"       | 31 lbs. |
| MES08 | 8 ft.      | 23¾"      | 58"        | 41 lbs. |
| MES10 | 10 ft.     | 26¼"      | 71½"       | 51 lbs. |
| MES12 | 12 ft.     | 28½"      | 85¼"       | 61 lbs. |
| WPS-M | PAIL SHELF |           |            |         |



Slip-Resistant Steps



## MECHANIC SINGLE – Parallel Sides

| MODEL | SIZE   | WEIGHT  |
|-------|--------|---------|
| MCG08 | 8 ft.  | 22 lbs. |
| MCG10 | 10 ft. | 23 lbs. |
| MCG12 | 12 ft. | 25 lbs. |
| MCG14 | 14 ft. | 30 lbs. |
| MCG16 | 16 ft. | 34 lbs. |
| MCG18 | 18 ft. | 47 lbs. |
| MCG20 | 20 ft. | 52 lbs. |



8-20 ft. = 16½" width

- Hemlock Rails: 1¾" x 2¾"
- Ash Rungs: 1¼"

## INDUSTRIAL STEPLADDER – Pine

- Slip-Resistant Steps
- Heavy-Duty 1¼" Steel Spreaders

| MODEL | SIZE       | WIDTH (A) | SPREAD (B) | WEIGHT  |
|-------|------------|-----------|------------|---------|
| PND03 | 3 ft.      | 17¼"      | 25½"       | 19 lbs. |
| PND04 | 4 ft.      | 18¾"      | 32¾"       | 22 lbs. |
| PND05 | 5 ft.      | 20"       | 40"        | 29 lbs. |
| PND06 | 6 ft.      | 21½"      | 46¾"       | 33 lbs. |
| PND08 | 8 ft.      | 24"       | 58¾"       | 45 lbs. |
| PND10 | 10 ft.     | 26¼"      | 72½"       | 52 lbs. |
| PND12 | 12 ft.     | 29"       | 85½"       | 65 lbs. |
| WPS-M | PAIL SHELF |           |            |         |



## MANHOLE SINGLE – Standard Style

| MODEL   | SIZE   | WEIGHT  |
|---------|--------|---------|
| WMSTG08 | 8 ft.  | 16 lbs. |
| WMSTG10 | 10 ft. | 20 lbs. |
| WMSTG12 | 12 ft. | 24 lbs. |
| WMSTG14 | 14 ft. | 28 lbs. |

- Ash Rungs: 1¼"
  - Hemlock Rails: 1¾" x 2¾"
- 14 1/4" WIDTH



## TRENCH LADDER – Parallel Sides

| MODEL | SIZE   | WEIGHT  |
|-------|--------|---------|
| WTL08 | 8 ft.  | 24 lbs. |
| WTL10 | 10 ft. | 25 lbs. |
| WTL12 | 12 ft. | 27 lbs. |
| WTL14 | 14 ft. | 32 lbs. |
| WTL16 | 16 ft. | 36 lbs. |

- Hemlock Rails: 1¾" x 2¾"
  - Banded on Both Ends
- 16" WIDTH



## BOSTON EXTENSION LADDER

| MODEL   | LENGTH | TOTAL LENGTH | WORKING WEIGHT |
|---------|--------|--------------|----------------|
| NBE16   | 16 ft. | 12 ft.       | 44 lbs.        |
| NBE20   | 20 ft. | 16 ft.       | 51 lbs.        |
| NBE24   | 24 ft. | 20 ft.       | 62 lbs.        |
| NBE28   | 28 ft. | 24 ft.       | 73 lbs.        |
| * NBE32 | 32 ft. | 28 ft.       | 80 lbs.        |
| * NBE36 | 36 ft. | 32 ft.       | 99 lbs.        |
| * NBE40 | 40 ft. | 35 ft.       | 108 lbs.       |

Hemlock Rails: 1¾" x 2¾"  
Ash Rungs: 1¼"

\*32', 36' & 40' Rated Type I 250 lbs.

- Spring Locks



## STOCKROOM LADDER – Pine

Rails: 3/4 x 3-1/4" Uses No. 200SH shoes.

Steps: 3/4 x 3-7/16"

Top Cap: 15-3/4" x 16-3/4"

| MODEL | SIZE  | WIDTH(A) | DEPTH(B) | WT.     |
|-------|-------|----------|----------|---------|
| SRL02 | 2 ft. | 16¼"     | 27¼"     | 15 lbs. |
| SRL03 | 3 ft. | 18½"     | 35½"     | 19 lbs. |
| SRL04 | 4 ft. | 19½"     | 42"      | 25 lbs. |





# SPECIALTY LADDERS

## HEAVY DUTY EXTENSION TRESTLES

This traditional New England design works with a flipper bar lock mechanism.

Hemlock Rails: 1 3/16" x 2 3/4"  
Oak Bars: 1 3/16" x 2 1/4"



| Model | Size   | Width (A) | Spread (B) | Ext'd.  | Wt.     |
|-------|--------|-----------|------------|---------|---------|
| HDT06 | 6 ft.  | 29"       | 46 1/2"    | 8' 5"   | 46 lbs. |
| HDT08 | 8 ft.  | 33"       | 60 1/4"    | 11' 11" | 61 lbs. |
| HDT10 | 10 ft. | 37"       | 76 1/2"    | 15' 3"  | 77 lbs. |
| HDT12 | 12 ft. | 41"       | 92 1/4"    | 18' 9"  | 92 lbs. |

**SAFETY NOTE:** As Trestle Ladder Scaffolds do not lend themselves to be used with guard rails, to comply with OSHA, you must use personal fall protection systems.

## INDUSTRIAL ROPE LADDERS


### FEATURES:

- 13/16" X 2 1/4" Oak Bars
- 15" wide overall
- 5/8" Diameter Side rails
- 7-ft. Tie Down Ends

P = Poly Rope

### TYPICAL USES:

- Escape Ladder
- Rescue Work
- Obstacle Courses



| MODEL | SIZE   | ROPE | WEIGHT  |
|-------|--------|------|---------|
| RL15P | 15 ft. | Poly | 13 lbs. |
| RL20P | 20 ft. | Poly | 18 lbs. |
| RL30P | 30 ft. | Poly | 25 lbs. |
| RL50P | 50 ft. | Poly | 43 lbs. |
| RL75P | 75 ft. | Poly | 63 lbs. |

## MONARCH SHIP'S LADDERS

Rails: 1 1/8" x 3 1/4"  
Steps: 1" x 3 5/8"

**\*DISCONTINUED ITEM\***

| MODEL | HEIGHT | HEIGHT | WT.     |
|-------|--------|--------|---------|
| MSL09 | 6 ft.  | 9 ft.  | 21 lbs. |
| MSL10 | 7 ft.  | 10 ft. | 24 lbs. |
| MSL11 | 8 ft.  | 11 ft. | 27 lbs. |
| MSL12 | 9 ft.  | 12 ft. | 30 lbs. |
| MSL13 | 10 ft. | 13 ft. | 33 lbs. |




## HEAVY-DUTY CHAIN FIRE ESCAPE LADDERS

**A Heavy-Duty Fire Escape Ladder That Comes In Its Own Box**

### FEATURES:

- Easy and safe to use for both children and adults.
- Permanently bolts to floor in its own beige, fire-resistant metal box.
- Strong, all-steel construction.
- Complete with mounting hardware, installation instructions and night escape planning booklet.
- Ladder construction strength exceeds 1,000 lb. laboratory static-test.

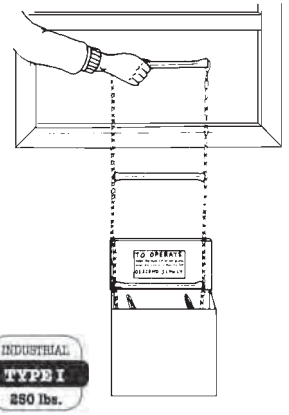

| MODEL | LENGTH | WIDTH | HEIGHT      | WEIGHT  |
|-------|--------|-------|-------------|---------|
| A2    | 15 ft. | 14"   | Two Story   | 16 lbs. |
| A3    | 25 ft. | 14"   | Three Story | 22 lbs. |
| A4    | 35 ft. | 14"   | Four Story  | 28 lbs. |



## WOOD LADDER ACCESSORIES AND PARTS

### LADDER SHOES FOR WOODEN LADDERS

#### Universal Safety Ladder Shoes

##### Model No. UNSH

These provide protection for all kinds of surfaces.  
Weight: 3 lbs. per pair





Front  
Model No. 100SH 1 1/8" x 3 1/2"  
Model No. 200SH 7/8" x 3 1/2"

#### Steel Spur Shoes

##### Model No. STSP

These safety shoes have steel points. When they become worn, the wheel can be turned for new points.  
Weight: 1.5 lbs. per pair



Back  
Model No. 150SH 1 1/8" x 2 3/8"  
Model No. 250SH 7/8" x 2 3/8"

**Lynn Ladder Recommends That All Industrial Wood Ladders be Purchased With Shoes Installed.**

| MODEL | LOCATION | SIZE            |
|-------|----------|-----------------|
| 100SH | Front    | 1 1/8" x 3 1/2" |
| 200SH | Front    | 7/8" x 3 1/2"   |
| 150SH | Back     | 1 1/8" x 2 3/8" |
| 250SH | Back     | 7/8" x 2 3/8"   |

| LADDER          | FRONT | BACK  |
|-----------------|-------|-------|
| No. 80 Mechanic | 200SH | 250SH |
| Industrial      | 100SH | 150SH |
| Stockroom       | 200SH | 200SH |

You can add front & back shoes to any wooden stepladder. Just call Lynn Ladder.

Lynn Ladder & Scaffolding carries a variety of Ladder Parts and Accessories. Please call your local Lynn Ladder branch for more information.



# LADDER ACCESSORIES



## LADDER LEVELERS FOR LYNN EXTENSION LADDERS

### Model No. LL-1X


Designed to fit all Lynn Ladder fiberglass, aluminum and wood extension ladders.

Lynn Ladder levelers provide height adjustments to either side of the ladder in 1-inch increments, up to a maximum of 12-inches. Ideal for use on most uneven surfaces. Either one or both siderails of the ladder can be adjusted. Installation is easy. You do **not** have to modify or cut the bottom of the ladder to install the Lynn Ladder levelers.

Weight: 10 lbs. per pair (boxed)



## LEVELOK® QUICK CONNECT LADDER LEVELING SYSTEM

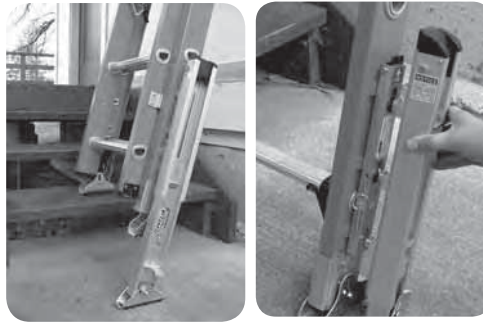

Temporarily mount Levelok Ladder Levelers on any extension, combination or sectional ladder. System consists of Ladder-mounted Quick Connect Base Units and specially configured Levelok Levelers that snap onto the base units

| MODEL      | DESCRIPTION     |
|------------|-----------------|
| LL-QC-1    | Base Unit (Pr.) |
| LL-STB-1QC | Leveler (1)     |




## LEVELOK® LADDER LEVELING SYSTEM

### Model No. LL-STB-1AA

The Levelok® Ladder Leveler enables virtually any fiberglass, aluminum or wood extension or sectional ladder to adapt to any indoor or outdoor situation. It can be operated using only your foot, freeing your hands to hold the ladder.

Weight: 14 lbs per pair, boxed

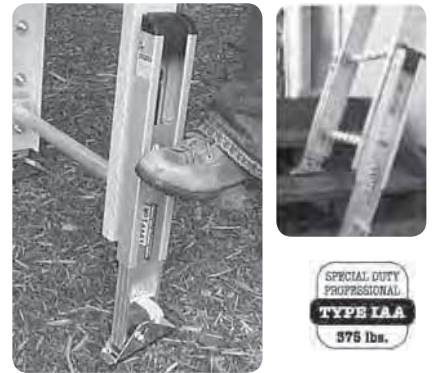

## LYN-LAD STABILIZER



### Model No. LS48

*This is our most popular model!*

- Material: Aluminum
- Non-Marring Tips.
- Spans 48"
- Wt: 5 lbs. (boxed)

## THE CORNER BUDDY CORNER LADDER STABILIZER

- Ideal for use on flat surfaces, corners and multi-dimensional surfaces.
- Provides easier access to soffits for electrical and siding applications.


### Model No. Q2470

Weight: 5 lbs. (boxed)


### Model No. Q2999

#### Hardware Kit


U-Bolts & Rubber Tips for Q2470

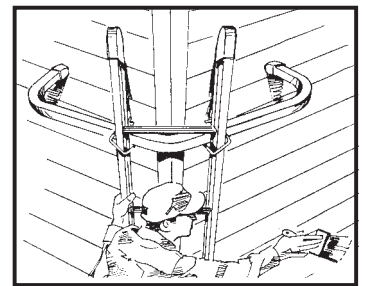

| MODEL  | DESCRIPTION                    | WEIGHT     |
|--------|--------------------------------|------------|
| LS48   | Lynn stabilizers               | 5 lbs. ea. |
| UBolts | Replacement bolts for LS-48    | 10 oz. pr. |
| RT     | Replace. rubber tips for LS-48 | 7 oz. pr.  |



UBolts



Rubber Tips

## HOUSE PADS



*Not designed to replace original end caps.*

### Model No. HP-12

12 Pairs  
Weight: 13 oz./Pr.


### Model No. HP

- Foam Rubber Cushions
- Fits Most Ladders
- Weight: 13 oz./Pr.

## STEEL FOLDING HOOKS

### Model No. LPSFH


- 6" opening
- Swivels out of way
- Fits wooden ladders
- Weight: 3 lbs./Pr.



## NYLON POLE STRAP

### Model No. LPNPS

- Rubber padded
- Adjustable nylon strap
- Weight: 1 lb.



Limited use. Consult factory for compatibility.

# LITTLE GIANT LADDER SYSTEMS®



“One Ladder Does It All.”®

The Little Giant Ladder Systems® are durable, portable and versatile. They are small, compact and one ladder can do the job of many conventional ladders.

## MXZ Ladder Systems®

The Little Giant MXZ Telescoping A-Frame Ladder replaces several sizes of stepladders. The ladder may be adjusted to fit safely on stairwells and other unlevel surfaces, and stores in half of its fully extended A-frame height. Ideal for areas with high ceilings, tight storage, and narrow entries. It comes with skid resistant feet and flared legs for improved stability.

Little Giant Aluminum MXZ A-Frame Ladder System



| Model    | Size   | Stepladder Height | Storage Height | Weight   |
|----------|--------|-------------------|----------------|----------|
| 10109MXZ | 15 ft. | 8 ft.-15 ft.      | 8' 7"          | 66 lbs.  |
| 10110MXZ | 17 ft. | 9 ft.-17 ft.      | 9' 7"          | 79 lbs.  |
| 10121MXZ | 21 ft. | 11 ft.-21 ft.     | 11' 7"         | 103 lbs. |




MXZ Ladder Systems®



MANUFACTURER CERTIFIES COMPLIANCE TO ANSI STANDARDS



CERTIFIED TO MEET OSHA REQUIREMENTS

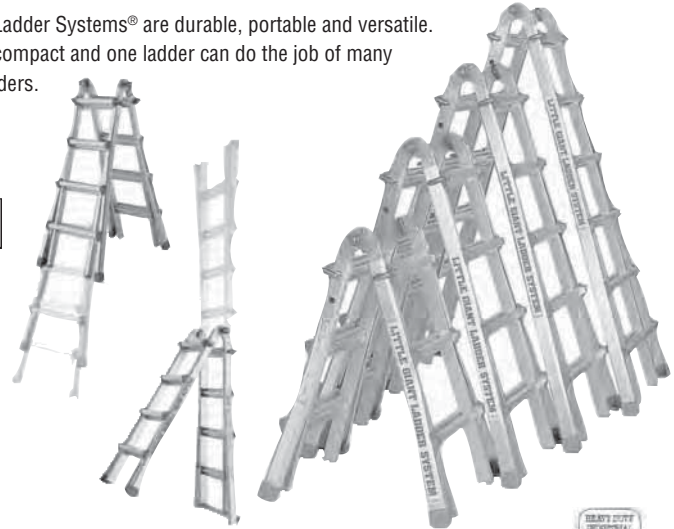

## LITTLE GIANT ALUMINUM LADDER SYSTEM



| Model   | Size   | Extension Height | Stepladder Height | Scaffold Height | Storage Height | Weight  |
|---------|--------|------------------|-------------------|-----------------|----------------|---------|
| 10101LG | 13 ft. | 7 ft. to 11 ft.  | 3 ft. to 5 ft.    | 3 ft.           | 3' 7"          | 32 lbs. |
| 10102LG | 17 ft. | 9 ft. to 15 ft.  | 4 ft. to 7 ft.    | 4 ft.           | 4' 7"          | 41 lbs. |
| 10103LG | 22 ft. | 11 ft. to 19 ft. | 5 ft. to 9 ft.    | 5 ft.           | 5' 7"          | 49 lbs. |
| 10126LG | 26 ft. | 13 ft. to 23 ft. | 6 ft. to 11 ft.   | 6 ft.           | 6' 7"          | 61 lbs. |

## Little Jumbo Safety Step™

**Safety Bar** – Provides added security for all jobs.

**Light-weight Aluminum** – Rugged, corrosion resistant, built to last.

**Locking System** – Smooth action, sturdy locking system for easy, safe set-up.

**Tip-N-Pull Wheels** – Designed for ease of mobility.

**Slip-Resistant Step Treads** – Wide slip-resistant steps provide maximum stability.

**Slip-Resistant Feet** – Ladder legs have slip-resistant feet for solid dependability.

| MODEL  | DESC.  | WT.     |
|--------|--|---------|
| 10210B | Two-Steps with Safety Bar                          | 15 lbs. |
| 10310B | Three-Steps with Safety Bar and Tip-n-Pull™ Wheels | 20 lbs. |
| 10410B | Four-Steps with Safety Bar and Tip-n-Pull™ Wheels  | 25 lbs. |



## ACCESSORIES FOR THE LITTLE GIANT LADDER SYSTEM

| Model   | Description  |
|---------|--|
| 12106   | Leg Leveler for Aluminum Ladder System—Attaches easily to either ladder rail |
| 10111ST | Wall Standoff—Positions ladder away from working surfaces                    |
| 10104   | Work Platform  |



Leg Leveler



Work Platform



Wall Standoff